

Agilent 4155C Semiconductor Parameter Analyzer

Agilent 4156C Precision Semiconductor Parameter Analyzer

Technical Data



Introduction


Basic Functions

Agilent 4155C and 4156C functions:

- Set measurement and/or stress conditions
- Control measurement and/or stress execution
- Perform arithmetic calculations
- Display measured and calculated results on the LCD display
- Perform graphical analysis
- Store and recall measurement setups, and measurement and graphical display data
- Dump to printers or plotters for hard-copy output

- Perform measurement and analysis with the built-in instrument BASIC
- Self test, Auto calibration

Configuration

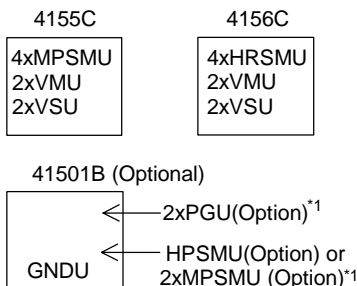

SMU: Source Monitor Unit
 Display resolution: 6 digits at each current range
 (0.01fA display resolution at 10pA range)^{*2}
 HRSMU: High Resolution SMU
 (1fA/2 μ V to 100mA/100V)
 MPSMU: Medium Power SMU
 (10fA/2 μ V to 100mA/100V)
 HPSMU: High Power SMU
 (10fA/2 μ V to 100mA/200V)
 VMU: Voltage Monitor Unit
 (0.2 μ V resolution in differential mode)
 VSU: Voltage Source Unit
 PGU: Pulse Generator Unit (1 channel)
 GNDU: Ground Unit

*1: Minimum number of installable MPSMU

*2: Accuracy not guaranteed. Minimum guaranteed resolution is 1fA at 10pA range

Hardware

Specification Condition

The “supplemental” information and “typical” entries in the following specifications are not warranted, but provide useful information about the functions and performance of the instruments.

The measurement and output accuracy

are specified at the rear panel connector terminals when referenced to the Zero Check terminal under the following conditions:

1. 23°C ± 5°C (double between 5°C to 18°C, and 28°C to 40°C if not noted otherwise)
2. After 40 minutes warm-up

3. Ambient temperature change less than ± 1°C after auto calibration execution.
4. Integration time: medium or long
5. Filter: ON (for SMUs)
6. Kelvin connection (for HRSMU, HPSMU, and GNDU)
7. Calibration period: 1 year

Agilent 4156C Precision Semiconductor Parameter Analyzer

HRSMU (High Resolution SMU) Specifications

Voltage Range, Resolution, and Accuracy (HRSMU)

Voltage Range	Set. Reso.	Set. Accuracy	Meas. Reso.	Meas. Accuracy	Max. Current
± 2V	100µV	±(0.02%+400µV)	2µV	±(0.01%+200µV)	100mA
± 20V	1mV	±(0.02%+3mV)	20µV	±(0.01%+1mV)	100mA
± 40V	2mV	±(0.025%+6mV)	40µV	±(0.015%+2mV) *1	
± 100V	5mV	±(0.03%+15mV)	100µV	±(0.02%+5mV) *2	

*1: 100mA (Vout > 20V), 50mA (20V < Vout ≤ 40V)

*2: 100mA (Vout > 20V), 50mA (20V < Vout ≤ 40V), 20mA (40V < Vout ≤ 100V)

Current Range, Resolution, and Accuracy (HRSMU)

Current Range	Set. Reso.	Set. Accuracy	Meas. Reso.	Meas. Accuracy	Max. V
±10pA	10fA	±(4%+400fA)*1*2	1fA	±(4%+20fA+1fA×Vout/100)*1*2	100V
±100pA	10fA	±(4%+400fA)*1*2	1fA	±(4%+40fA+10fA×Vout/100)*1*2	100V
±1nA	100fA	±(0.5%+0.7pA+1fA×Vout)*2	10fA	±(0.5%+0.4pA+1fA×Vout)*2	100V
±10nA	1pA	±(0.5%+4pA+10fA×Vout)	10fA	±(0.5%+2pA+10fA×Vout)	100V
±100nA	10pA	±(0.12%+40pA+100fA×Vout)	100fA	±(0.1%+20pA+100fA×Vout)	100V
±1µA	100pA	±(0.12%+400pA+1pA×Vout)	1pA	±(0.1%+200pA+1pA×Vout)	100V
±10µA	1nA	±(0.07%+4nA+10pA×Vout)	10pA	±(0.05%+2nA+10pA×Vout)	100V
±100µA	10nA	±(0.07%+40nA+100pA×Vout)	100pA	±(0.05%+20nA+100pA×Vout)	100V
±1mA	100nA	±(0.06%+400nA+1nA×Vout)	1nA	±(0.04%+200nA+1nA×Vout)	100V
±10mA	1µA	±(0.06%+4µA+10nA×Vout)	10nA	±(0.04%+2µA+10nA×Vout)	100V
±100mA	10µA	±(0.12%+40µA+100nA×Vout)	100nA	±(0.1%+20µA+100nA×Vout) *3	

*1: The accuracy is applicable when offset cancellation has been performed.

*2: The offset current specification is multiplied by one of the following factors depending upon the ambient temperature and humidity (RH = Relative Humidity):

Temperature	Humidity %	RH
5 - 60	5 - 60	60 - 80
5°C to 18°C	×2	×2
18°C to 28°C	×1	×2
28°C to 40°C	×2	×5

*3: 100V (Iout > 20mA)

40V (20mA < Iout ≤ 50mA)

20V (50mA < Iout ≤ 100mA)

Vout is the output voltage in volts.

Iout is the output current in amps.

For example, accuracy specifications are given as ±% of set/measured value (0.04%) plus offset value (200nA+1nA×Vout) for the 1mA range. The offset value consists of a fixed part determined by the set/measurement range and a proportional part that is multiplied by Vout or Vout/100.

Voltage/Current Compliance (Limiting):

The SMU can limit output voltage or current to prevent damaging the device under test.

Voltage: 0V to ±100V

Current: ±100fA to ±100mA

Compliance Accuracy: Same as the current (voltage) settling accuracy.

HRSMU Supplemental Information :

Maximum allowable cable resistance when using Kelvin connection (Force, Sense): 10Ω

Typical voltage source output resistance (Force line/non-Kelvin connection): 0.2Ω

Voltage measurement input resistance/ current source output resistance: ≥10¹⁵Ω (10pA range)


Current compliance setting accuracy for opposite polarity:

10pA to 10nA range: V/I setting accuracy ± 12% of range

100nA to 100mA range: V/I setting accuracy ± 2.5% of range

Output terminal/connection:

Dual triaxial connectors, Kelvin (remote sensing)

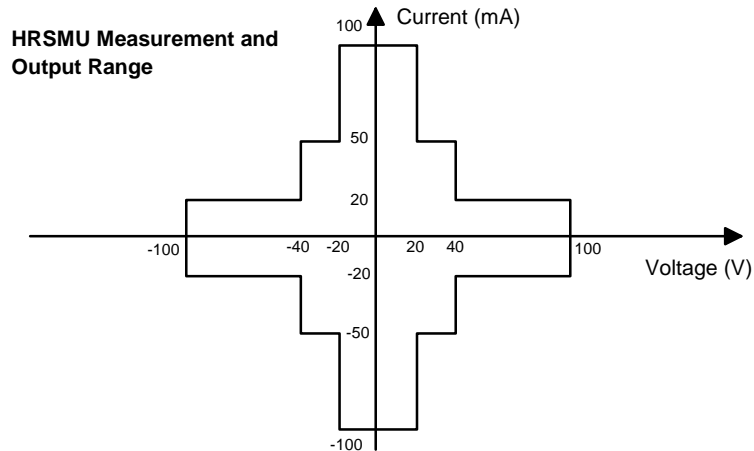

VSU (Voltage Source Unit)

Specifications

VSU Output Range:

Voltage Range	Meas. Reso.	Meas. Accuracy
±20V	1mV	±(0.05% of setting+10mV)*1

*1: Specification is applicable under no load current.

Max. Output Current: 100mA

VSU Supplemental Information:

Output resistance: 0.2Ω

Maximum load capacitance: 10μF

Maximum slew rate: 0.2V/μs

Current limit: 120mA (typical)

Output Noise: 1mV rms (typical)

VMU (Voltage Monitor Unit)

Specifications

VMU Measurement Range, Resolution, and Accuracy:

Voltage Range	Meas. Reso.	Meas. Accuracy
±2V	2μV	±(0.02%+200μV)
±20V	20μV	±(0.02%+1mV)

VMU Differential Mode Range

Resolution, and Accuracy:

Diff V Range	Meas. Reso.	Meas. Accuracy
±0.2V	0.2μV	±(0.03% + 10μV+0.3μV×Vi)
±2V	2μV	±(0.02%+100μV+3μV×Vi)

Max. Common Mode Voltage: ± 20V

Note: Vi is the input voltage of VMU2 in volts.

For example, accuracy specifications are given as ±% of set/measured value (0.02%) plus offset value (1mV+13μV×Vi) for the 2V range. The differential mode offset value consists of a fixed part determined by the measurement range and a proportional part that is multiplied by Vi.

VMU Supplemental Information:

Input Impedance: ≥1GΩ

Input leakage current (@0V): ≤ 500pA (Typical)

Measurement noise: 0.01% of range (p-p) (Typical)

Differential mode measurement noise: 0.005% of range (p-p) (Typical)

Agilent 4155C Semiconductor Parameter Analyzer

MPSMU (Medium Power SMU) Specifications

Voltage Range, Resolution, and Accuracy (MPSMU)

Voltage Range	Set. Reso.	Set. Accuracy	Meas. Reso.	Meas. Accuracy	Max. Current
± 2V	100μV	±(0.03%+900μV+0.3×Iout)	2μV	±(0.02%+700μV+0.3×Iout)	100mA
± 20V	1mV	±(0.03%+4mV+0.3×Iout)	20μV	±(0.02%+2mV+0.3×Iout)	100mA
± 40V	2mV	±(0.03%+7mV)+0.3×Iout)	40μV	±(0.02%+3mV+0.3×Iout)	*1
± 100V	5mV	±(0.04%+15mV)+0.3×Iout)	100μV	±(0.03%+5mV+0.3×Iout)	*2

*1: 100mA (Vout > 20V), 50mA (20V < Vout ≤ 40V)

*2: 100mA (Vout > 20V), 50mA (20V < Vout ≤ 40V), 20mA (40V < Vout ≤ 100V)

Current Range, Resolution, and Accuracy (MPSMU)

Current Range	Set. Reso.	Set. Accuracy	Meas. Reso.	Meas. Accuracy	Max. V
±1nA	100fA	±(0.5%+3pA+2fA×Vout)	10fA	±(0.5%+3pA+2fA×Vout)	100V
±10nA	1pA	±(0.5%+7pA+20fA×Vout)	10fA	±(0.5%+5pA+20fA×Vout)	100V
±100nA	10pA	±(0.12%+50pA+200fA×Vout)	100fA	±(0.1%+30pA+200fA×Vout)	100V
±1μA	100pA	±(0.12%+400pA+2pA×Vout)	1pA	±(0.1%+200pA+2pA×Vout)	100V
±10μA	1nA	±(0.12%+5nA+20pA×Vout)	10pA	±(0.1%+3nA+20pA×Vout)	100V
±100μA	10nA	±(0.12%+40nA+200pA×Vout)	100pA	±(0.1%+20nA+200pA×Vout)	100V
±1mA	100nA	±(0.12%+500nA+2nA×Vout)	1nA	±(0.1%+300nA+2nA×Vout)	100V
±10mA	1μA	±(0.12%+4μA+20nA×Vout)	10nA	±(0.1%+2μA+20nA×Vout)	100V
±100mA	10μA	±(0.12%+50μA+200nA×Vout)	100nA	±(0.1%+30μA+200nA×Vout)	*1

*1: 100V (Iout > 20mA), 40V (20mA < Iout ≤ 50mA), 20V (50mA < Iout ≤ 100mA)

Output terminal/connection:

Single triaxial connector, non-Kelvin (no remote sensing)

Voltage/Current Compliance

(Limiting):

The SMU can limit output voltage or current to prevent damaging the device under test.

Voltage: 0V to ±100V

Current: ±1pA to ±100mA

Compliance Accuracy: Same as the current (voltage) settling accuracy.

MPSMU Supplemental Information:

Typical voltage source output resistance: 0.3Ω

Voltage measurement input resistance/ current source output resistance: ≥10¹³Ω (1nA range)

Current compliance setting accuracy for opposite polarity:

1nA to 10nA range: V/I setting accuracy ± 12% of range

100nA to 100mA range: V/I setting accuracy ± 2.5% of range

Vout is the output voltage in volts.

Iout is the output current in amps.


For example, accuracy specifications are given as ±% of set/measured value (0.1%) plus offset value (30pA+200fA×Vout) for the 100nA range. The offset value consists of a fixed part determined by the set/measurement range and a proportional part that is multiplied by Vout.

VSU Specifications

Same as 4156C VSU.

VMU Specifications

Same as 4156C VMU.

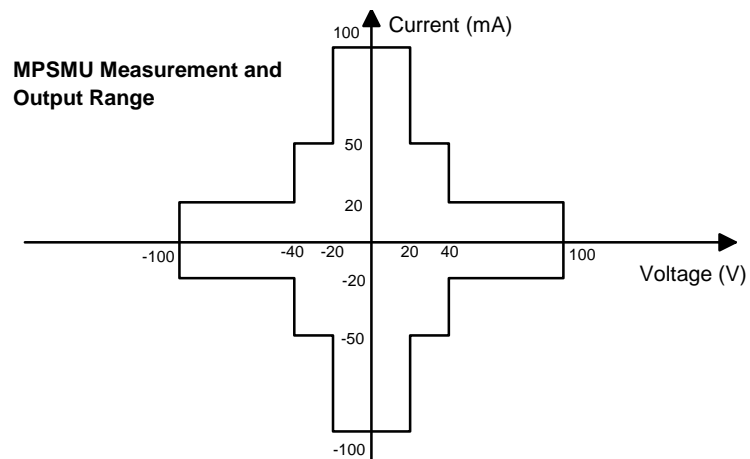

Agilent 41501B SMU and Pulse Generator Expander

HPSMU (High Power SMU) Specifications

Voltage Range, Resolution, and Accuracy (HPSMU)

Voltage Range	Set. Reso.	Set. Accuracy	Meas. Reso.	Meas. Accuracy	Max. Current
± 2V	100μV	±(0.03%+900μV)	2μV	±(0.02%+700μV)	1A
± 20V	1mV	±(0.03%+4mV)	20μV	±(0.02%+2mV)	1A
± 40V	2mV	±(0.03%+7mV)	40μV	±(0.02%+3mV)	500mA
± 100V	5mV	±(0.04%+15mV)	100μV	±(0.03%+5mV)	125mA
± 200V	10mV	±(0.04%+30mV)	200μV	±(0.035%+10mV)	50mA

Current Range	Set. Reso.	Set. Accuracy	Meas. Reso.	Meas. Accuracy	Max. V
±1nA	100fA	±(0.5%+3pA+2fA×Vout)	10fA	±(0.5%+3pA+2fA×Vout)	200V
±10nA	1pA	±(0.5%+7pA+20fA×Vout)	10fA	±(0.5%+5pA+20fA×Vout)	200V
±100nA	10pA	±(0.12%+50pA+200fA×Vout)	100fA	±(0.1%+30pA+200fA×Vout)	200V
±1μA	100pA	±(0.12%+400pA+2pA×Vout)	1pA	±(0.1%+200pA+2pA×Vout)	200V
±10μA	1nA	±(0.12%+5nA+20pA×Vout)	10pA	±(0.1%+3nA+20pA×Vout)	200V
±100μA	10nA	±(0.12%+40nA+200pA×Vout)	100pA	±(0.1%+20nA+200pA×Vout)	200V
±1mA	100nA	±(0.12%+500nA+2nA×Vout)	1nA	±(0.1%+300nA+2nA×Vout)	200V
±10mA	1μA	±(0.12%+4μA+20nA×Vout)	10nA	±(0.1%+2μA+20nA×Vout)	200V
±100mA	10μA	±(0.12%+50μA+200nA×Vout)	100nA	±(0.1%+30μA+200nA×Vout) *1	
±1A	100μA	±(0.5%+500μA+2μA×Vout)	1μA	±(0.5%+300μA+2μA×Vout) *2	

*1: 200V (Iout ≤ 50mA), 100V (50mA < Iout ≤ 100mA)

*2: 200V (Iout ≤ 50mA), 100V (50mA < Iout ≤ 125mA), 40V (125mA < Iout ≤ 500mA), 20V (500mA < Iout ≤ 1mA)

Vout is the output voltage in volts.

Iout is the output current in amps.

For example, accuracy specifications are given as ±% of set/measured value (0.1%) plus offset value (30pA+200fA×Vout) for the 100nA range. The offset value consists of a fixed part determined by the set/measurement range and a proportional part that is multiplied by Vout.

PGU (Pulse Generator Unit) Specifications

Modes: Pulse or constant

Amplitude: 0Vpp to 40Vpp

Window: -40.0V to +40.0V

Maximum current:

±200mA (pulse width: ≤1ms, average current ≤100mA)

±100mA

Pulse width: 1.0μs to 9.99s

Minimum resolution: 100ns

Pulse period: 2.0μs to 10.0s

Minimum resolution: 100ns

Delay: 0s to 10s

Minimum resolution: 100ns

Transition time: 100ns to 10ms

Minimum resolution: 1ns

Output impedance: 50Ω or low

impedance (≤1Ω)

Burst count range: 1 - 65535

Output terminal/connection:

Dual triaxial connectors, Kelvin (remote sensing)

Voltage/Current Compliance

(Limiting):

Voltage: 0V to ±200V

Current: ±1pA to ±1A

Compliance Accuracy: Same as the current (voltage) settling accuracy.

HPSMU Supplemental Information:

Maximum allowable cable resistance when using Kelvin connection:

Force: 0.7Ω (100mA to 1A)

Force: 10Ω (≤100mA)

Sense: 10Ω

Typical voltage source output resistance (Force line/non-Kelvin connection): 0.2Ω


Voltage measurement input resistance/ current source output resistance:

≥10¹³Ω (1nA range)

Current compliance setting accuracy for opposite polarity:

1nA to 10nA range: V/I setting accuracy ± 12% of range

100nA to 1A range: V/I setting accuracy ± 2.5% of range

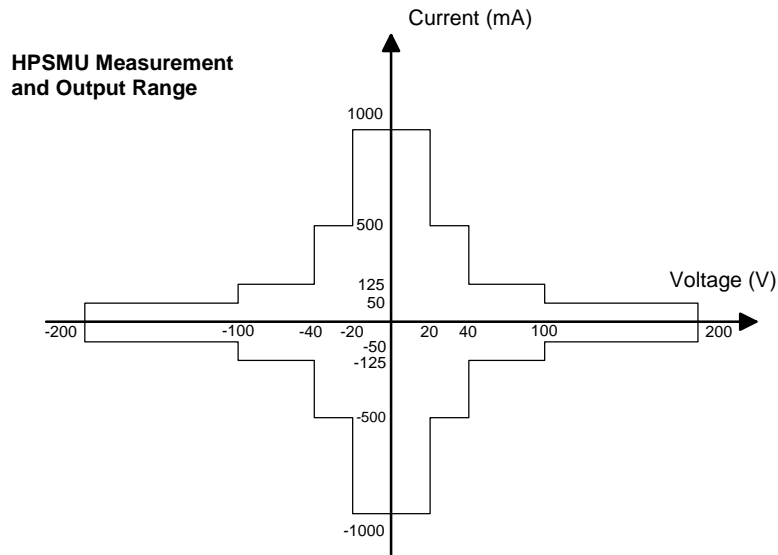

Pulse/DC Output Voltage and Accuracy (PGU)

Set Parameter	Voltage Range	Resolution	Accuracy*1
Base	±20V	4mV	±(1% of Base + 50mV +1% of Pulse)
	±40V	8mV	±(1% of Base + 50mV +1% of Pulse)
Pulse	±20V	4mV	±(3% of Base + 50mV)
	±40V	8mV	±(3% of Base + 50mV)

Note: DC output is performed by the Base parameter.

*1: Accuracy is specified at leading edge - trailing edge = 1μs

Pulse parameter accuracy

Period: $\pm(2\% + 2\text{ns})$

Width: $\pm(3\% + 2\text{ns})$

Delay: $\pm(2\% + 40\text{ns})$

Transition time: $\pm(5\% + 10\text{ns})$

Trigger output

Level: TTL

Timing: Same timing and width as PGU1 pulse output

PGU Supplemental Information:

Overshoot: $\leq \pm 5\%$ of amplitude $\pm 10\text{mV}$

(50Ω output impedance to 50Ω load)

Pulse width jitter: $0.2\% + 100\text{ps}$

Pulse period jitter: $0.2\% + 100\text{ps}$

Maximum slew rate: $100\text{V}/\mu\text{s}$

(50Ω output impedance to 50Ω load)

Noise: 0.2% of range (@ DC output)

MPSMU Specifications

Same as 4155C MPSMU.

GNDU (Ground Unit)

Specifications:

Output Voltage: $0\text{V} \pm 100\mu\text{V}$

Maximum sink current: 1.6A

Output terminal/connection:

Single triaxial connector,

Kelvin (remote sensing)

GNDU Supplemental Information

Load Capacitance: $\leq 1\mu\text{F}$

Cable resistance:

Force: $\leq 1\Omega$

Sense: $\leq 10\Omega$

HRSMU, MPSMU, HPSMU

Supplemental Information

Maximum capacitive load: 1000pF

Maximum guard capacitance: 900pF

Maximum shield capacitance: 5000pF

Maximum guard offset voltage: $\pm 1\text{mV}$

Noise characteristics (typical,

Filter: ON):

Voltage source noise: 0.01% of V range (rms)

Current source noise: 0.1% of I range (rms)

Voltage monitor noise: 0.02% of V range (p-p)

Current monitor noise: 0.2% of I

Output overshoot (typical, Filter: ON):

Voltage source: 0.03% of V range

Current source: 1% of I range

Range switching transient noise

(typical, Filter: ON):

Voltage ranging: 250mV

Current ranging: 10mV

Maximum slew rate: $0.2\text{V}/\mu\text{s}$

Pulse Range and Pulse Parameter (PGU)

Range	Period	Width	Delay	Set resolution
1	$2\mu\text{s} - 100\mu\text{s}$	$1\mu\text{s} - 100\mu\text{s}$	$0 - 100\mu\text{s}$	$0.1\mu\text{s}$
2	$100\mu\text{s} - 1000\mu\text{s}$	$1\mu\text{s} - 999\mu\text{s}$	$0 - 1000\mu\text{s}$	$1\mu\text{s}$
3	$1\text{ms} - 10\text{ms}$	$0.01\text{ms} - 9.99\text{ms}$	$0 - 10\text{ms}$	$10\mu\text{s}$
4	$10\text{ms} - 100\text{ms}$	$0.1\text{ms} - 99.9\text{ms}$	$0 - 100\text{ms}$	$100\mu\text{s}$
5	$100\text{ms} - 1000\text{ms}$	$1\text{ms} - 999\text{ms}$	$0 - 1000\text{ms}$	1ms
6	$1\text{s} - 10\text{s}$	$0.01\text{s} - 9.99\text{s}$	$0 - 10\text{s}$	10ms

Note: Pulse width is defined when leading time is equal to trailing time. PGU2 must be set in the same range as PGU1.

Range	Set Restrictions	Accuracy
$100\text{ns} - 1000\text{ns}$	1ns	$\pm(5\% + 10\text{ns})$
$0.5\mu\text{s} - 10\mu\text{s}$	10ns	$\pm(5\% + 10\text{ns})$
$5.0\mu\text{s} - 100.0\mu\text{s}$	100ns	$\pm(5\% + 10\text{ns})$
$50\mu\text{s} - 1000\mu\text{s}$	$1\mu\text{s}$	$\pm(5\% + 10\text{ns})$
$0.5\text{ms} - 10.0\text{ms}$	$10\mu\text{s}$	$\pm(5\% + 10\text{ns})$

Restrictions:

Pulse width < Pulse Period, Delay time < Pulse period, Leading time < Pulse width $\times 0.8$

Trailing time < (Pulse period - Pulse width) $\times 0.8$

Period, width, and delay of PGU1 and PGU2 must be in the same range. Leading time and trailing time for a PGU must be in the same range.

Capacitance Calculation Accuracy (Supplemental Data)

Accuracy is derived from the current range, voltage range, capacitance measurement and leakage current measurement integration times, and the guard capacitance of cabling and step voltage. The information in the chart below is based on the following conditions: Voltage Range: $\pm 20\text{V}$; Voltage Step: 100mV ; Guard Capacitance: 100pF ; Equivalent parallel resistance of DUT: $1 \times 10^{15}\text{W}$. The ratio of integration times for capacitance measurement and leakage current measurement is 1:1.

HRSMU

Current Range	Integration Time	Measurement Range	Resolution	Accuracy Reading %	Offset
100pA	0.5sec	1pF	5fF	4.2	70fF
	1sec	20pF	10fF	4.3	90fF
1nA	2sec	760pF	20fF	4.3	130fF
	0.1sec	700pF	10fF	0.84	160fF
10nA	0.5sec	4.5nF	40fF	0.85	280fF
	2sec	18nF	200fF	0.93	740fF
	0.1sec	7nF	10fF	0.84	200fF
	0.5sec	45nF	40fF	0.85	440fF
	2sec	180nF	200fF	0.93	1.4pF
	10sec	940nF	1pF	1.3	6.2pF

MPSMU

Current	Integration Time	Measurement Range	Resolution	Accuracy Reading %	Offset
1nA	0.1sec	700pF	10fF	0.91	170fF
	0.5sec	4.5nF	40fF	0.94	340fF
	2sec	18nF	200fF	1.0	1pF
10nA	0.1sec	7nF	10fF	0.91	180fF
	0.5sec	45nF	40fF	0.94	480fF
	2sec	180nF	200fF	1.0	1.6pF
	10sec	940nF	1pF	1.6	7.6pF

Current compliance must be larger than the current range. The capacitance of the DUT and measurement system must be smaller than the measurement range. The measurement range might be reduced by the leakage current.

Functions

Measurement Set-up

Setting

- Fill-in-the-blanks using front-panel or full-size external keyboard
- Load settings from floppy disk or via the LAN port
- Program using internal Instrument BASIC or via GPIB
- HELP Function
- Library: Default measure setup, Vce-Ic, Vds-Id, Vgs-Id, and Vf-If are pre-defined softkeys
- User-defined measurement setup library
- Auto file load function on power-up

Measurement

The 4155C and 4156C can perform dc or pulsed force/measure, and stress force. For dc, voltage/current sweep and sampling (time domain) measurements are available.

Voltage/Current Sweep Measurement Characteristics

Each SMU and VSU can sweep using VAR1 (primary sweep), VAR2 (subordinate sweep), or VAR1' (synchronous sweep).

VAR1

Primary sweep controls the staircase (dc or pulsed) voltage or current sweep. Maximum number of steps: 1001 for one VAR1 sweep. Sweep type: linear or logarithmic Sweep direction: Single or double sweep Hold time: Initial wait time or wait time after VAR2 is set: 0 to 655.35s with 10ms resolution Delay time: Wait time from VAR1 step to the start of the measurement: 0 to 65.535s with 100 μs resolution

VAR2

Subordinate linear staircase or linear pulsed sweep. After primary sweep is completed, the VAR2 unit output is incremented. Maximum number of steps: 128

VAR1'

Staircase or pulse sweep synchronized with the VAR1 sweep. Sweep is made with a user specified ratio and offset value. VAR1' output is calculated as $VAR1' = a \times VAR1 + b$, where "a" is the user specified ratio and "b" is the user specified offset value.

CONSTANT

A source unit can be set as a constant voltage or current source depending on the unit.

PULSE

One of the SMUs can be set as a pulse source.

Pulse width: 0.5ms to 100ms, 100μs resolution.

Pulse period:

(5ms to 1s (\geq pulse width + 4ms), 100μs resolution.

SMU pulse setting accuracy (supplemental information, at fixed range measurement except multi-channel measurement):

Width: 0.5% + 50μs

Period: 0.5% + 100μs

Trigger output delay for pulsed measurement: 0 - 32.7ms with 100μs resolution (< pulse width).

Sampling (Time Domain) Measurement Characteristics

Displays the time sampled voltage/current data versus time.

Maximum sampling points: 10,001 (linear)

Sampling mode: linear, log, and thinned-out

Note: The thinned-out mode is similar to reverse-log sampling. Sampling measurement continues by thinning out older data until the sampling completion condition is satisfied.

Sampling interval range and resolution:

Linear scale (auto mode):

60μs to 480μs range: 20μs resolution

480μs to 1s range: 80μs resolution

1s to 65.535s range: 2ms resolution

Linear scale (no limit mode), log scale, and thinned-out modes:

560μs (720μs at thinned-out mode)

to 1s range: 80μs resolution

1s to 65.535s range: 2ms resolution

Note: The following conditions must be set when initial interval is less than 2ms.

- Number of measurement channels: 1
- Measurement ranging: fixed range
- Stop condition: disable

Hold time:

Initial wait time: 0.03s to 655.35s, 100μs resolution

Sampling measurement stop condition:

A condition to stop the sampling can be defined.

Sampling interval setting accuracy (supplemental data):

0.5% + 10μs (sampling interval \leq 480μs)

0.5% + 10μs (480μs \leq sampling interval < 2ms)

0.5% + 100μs (2ms \leq sampling interval)

C-V Measurement Characteristics

Capacitance is calculated value derived from the following equation:

$$C = \frac{dQ}{dV}$$

dQ is the charge when dV, the step voltage, is applied by the SMU; dQ is derived from the measurement current (amps) and the integration time (seconds).

Measurement Range:

Measurement range depends on the current range, integration time, and step voltage (refer to the chart in supplemental data).

Capacitance Calculation Accuracy:

Accuracy is dependent on accuracy of the current measurement and voltage measurement, and the stray capacitance and leakage current of measurement system etc (Refer to the chart in supplemental data).

Zero Offset:

Cancels stray capacitance of the fixtures and test leads.

Leakage Current Compensation:

Cancels the influence of the leakage current to the capacitance measurement.

Stress Force Characteristics

SMU, VSU, and PGU output can be forced for the user specified period.

Stress time set range:

5000μs to 31,536,000s (365 days)

Resolution:

100μs (500μs \leq stress time \leq 10s)

10ms (10s < stress time \leq 31,536,000s)

Burst pulse count:

1 - 65,535 (PGU only)

Trigger:

The 4155C and 4156C output a gate trigger while stress channels are forcing stress.

Knob Sweep

In the knob sweep mode, sweep range is controlled instantaneously with the front-panel rotary knob. Only the Channel Definition page needs to be defined.

Standby Mode

SMUs in “Standby” remain programmed to their specified output value even as other units are reset for the next measurement.

Other Characteristics

Limited auto-ranging, voltage/current compliance, power compliance, automatic sweep abort functions, self-test, and self-calibration.

Arithmetic and Analysis Functions

Arithmetic Functions

User Functions

Up to six USER FUNCTIONS can be defined using arithmetic expressions. Measured data and analyzed variables from graphics analysis (marker, cursor, and line data) can be used in the computation. The results can be displayed on the LCD.

Arithmetic Operators

+, -, *, /, ^, LGT (logarithm, base 10), LOG (logarithm, base e), EXP (exponent), DELTA, DIFF (differential), INTEG (integration), MAVG (moving average), SQRT, ABS (absolute value), MAX, MIN, AVG (averaging), COND (conditional evaluation).

Physical Constants

Keyboard constants are stored in memory as follows:

- q: Electron Charge, 1.602177 E-19 C
- k: Boltzman’s Constant, 1.380658 E-23
- e: Dielectric Constant of Vacuum, 8.854188 E-12

Engineering Units

The following unit symbols are also available on the keyboard: f (10^{-15}), p (10^{-12}), n (10^{-9}), u or μ (10^{-6}), m (10^{-3}), K (10^3), M (10^6), G (10^9)

Analysis Capabilities

Overlay Graph Comparison

A graphics plot can be stored and later recalled as an overlay plane. Four overlay planes can be stored. One plane can be overlaid onto the current data.

Marker

Marker to min/max, interpolation, direct marker, and marker slip

Cursor

Long and short, direct cursor.

Line

Two lines, normal mode, grad mode, tangent mode, and regression mode.

Scaling

Auto scale and zoom.

Data Variable Display

Up to two user defined parameters can be displayed on the graphics screen.

Read Out Function

The read out functions are built-in functions for reading various values related to the marker, cursor, or line.

Automatic Analysis Function

On a graphics plot, the markers and lines can be automatically located using the auto analysis setup. Parameters can be automatically determined using automatic analysis, user function, and read out functions.

User Variable

Display the data on the LCD via GPIB or instrument BASIC.

Output

Display

Display Modes

Graphics and list.

Graphics Display

X-Y or X-Y1/Y2 plot of source current/voltage, measured current/voltage, time, or calculated USER FUNCTION data.

List Display

Measurement data and calculated USER FUNCTION data are listed in conjunction with VAR1 step number or time domain sampling step number. Up to eight data sets can be displayed.

Display

8.4 inch diagonal color active matrix LCD, 640 dot (H) \times 480 dot (V)

Hard Copy Functions

Graphics Hard Copy

Measured data and all data appearing on the LCD can be output via GPIB,

parallel printer port, or network interface to supported HP plotters or printers. PCL, HR PCL (high-resolution PCL), and HP GL formats are supported (selectable).

Text Hard Copy

Print out setup information or measured data list as ASCII text via GPIB, parallel printer port, or network interface to supported HP plotters or printers. PCL, HR PCL, and HP GL formats are supported (selectable).

Hard Copy File

Hard copy output can be stored to an internal or external mass storage device instead of sending it to a printer or plotter. The data can be stored in PCL, HR PCL, TIFF, HR TIFF (high-resolution TIFF), or HP GL formats.

Hard Copy via Network Interface

The network interface has lpr client capability.

High-Resolution (HR) Mode

This file mode is available for cases where an extremely clean print-out or plot is desired.

Note: High resolution mode takes significantly greater CPU time to generate, so its use is recommended for final reports only.

Data Storage

Mass storage device:

Built-in 3.5 inch flexible disk drive
Media: 3.5 inch 2HD or 2DD diskette
Format type: HP LIF and DOS

User area:

1.44Mbyte (2HD) or 720Kbyte (2DD)
File types:

Auto start program file, initial setup file, measurement setup file, measurement setup/result file, stress setup file, customize file, hard copy data file, and instrument BASIC program and data file.

Format of data made by the HP BASIC program:

Data made by the HP BASIC program and data made by the instrument BASIC program are compatible.

Network mass storage device:

An NFS mountable mass storage device

File types:

Auto start program file, initial setup file, measurement setup file, measurement setup/result file, stress setup file, customize file, and hard copy data file.

Maximum number of files allowed per directory on network mass storage device: 199

Data storage (supplemental data):
2HD DOS format:

Available bytes: 1457K (byte)

File size:

Measurement setup: 3843 (byte)

Stress setup: 601 (byte)

Measurement setup/result

(Typical data): 15387 (byte)

(VAR1: 101, VAR2: 5)

Customized system setup: 1661 (byte)

Hardcopy data: 30317 (byte)

(Monochrome PCL 75DPI file)

Hardcopy data: 38702 (byte)

(monochrome TIFF file)

Note: For LIF format, the total number of files is limited to 199.

Repeating and Automating Test

Instrument Control

Agilent 4155C and 4156C function control:

Internal or external computer controls the 4155C and 4156C functions via the GPIB interface

Command sets:

SCPI command set

Agilent FLEX command set

Agilent 4145B command set

Program Memory:

Using the 4155C/4156C Agilent FLEX command set, the user can store program code in the 4155C or the 4156C. The maximum number of subprograms is 256 (8 bit).

External instrument remote control:

Control external equipment via the GPIB interface.

Instrument BASIC

Instrument BASIC is a subset of HP BASIC.

Functions:

Arithmetic operation, binary operation, string manipulation, logical operation, array operation, program flow control, event-initiated branching, program editing and debugging support, mass storage operation, instrument control, real-time clock, softkey operation, and graphics.

Agilent 4145B automatic sequence program (ASP) typing aid:

4145B ASP-like syntax softkeys are available in instrument BASIC. A 4145B ASP file cannot be read by the 4155C or 4156C.

Remote control:

Instrument BASIC is remote controllable from an external computer via the GPIB interface.

Instrument BASIC memory area (supplemental data):

Program (text) area: 16K (byte)

Variable/stack area: 500K (byte)

Common variable area: 600K (byte)

Note: The memory size for common variable is decreased when hard copy or disk operation is performed.

Trigger

Input:

External trigger input starts a sweep or sampling measurement or can be used as a trigger input for continuing an Instrument BASIC program.

Input Level:

TTL level, negative or positive edge trigger

Output:

External trigger can be generated by the following events: start of each sweep measurement step, start of each pulse (SMU) output, while the stress source is forcing, and Instrument BASIC trigger out command execution.

Output Level:

TTL level, negative or positive logic

4145B Data Compatibility and Syntax Commands

Setup and data file

Measurement setup and data from the 4145B can be loaded.

GPIB program

GPIB programs for the 4145B can be used when the 4145B command set is selected.

Note: There is a possibility that GPIB programs for the 4145B will need to be modified.

Interfaces

GPIB interface:

SH1, AH1, T6, L4, SR1, RL1, PP0,

DC1, DT1, C1, C2, C3, C4, C11, E2

Parallel interface: Centronics

RJ45:

Ethernet IEEE 802.3 10BASE-T for a 10Mbps CSMA/CD local area network

External keyboard:

Compatible PC-style 101-key keyboard (mini DIN connector)

Interlock and LED connector

R-BOX control connector

Trigger in/out

SMU/PGU selector control connector (41501B)

Sample Application Programs

Flash EEPROM test

TDDDB

Constant I (Electromigration test)

V-Ramp Test

J-Ramp Test

SWEAT

GO/NO-GO Test

HCI degradation test

Sample VEE Program

Vth measurement using the 4155C or 4156C, the E5250A, and a wafer prober.

VXI plug&play Drivers

VXIplug&play drivers for the 4155C and 4156C

Supported VXIplug&play operating systems:

Windows NT

Windows 95

Format

Tree-structured function panel.

Panel mode for hardware configuration and manual parameter setting.

Parameter mode for variable definition and I/O configuration.

General Specifications

Temperature range

Operating:

+10°C to +40°C (if using floppy disk drive)

+5°C to +40°C (if not using floppy disk drive)

Storage: -22°C to +60°C

Humidity range

Operating:

20% to 80% RH, non-condensing and wet bulb temperature \leq 29°C (if using floppy disk drive)

15% to 80% RH, non-condensing and wet bulb temperature \leq 29°C (if not using floppy disk drive)

Storage: 5% to 90% RH, non-condensing and wet bulb temperature \leq 39°C

Altitude

Operating: 0 to 2,000 m (6,561 ft)

Storage: 0 to 4,600 m (15,091 ft)

Power requirement

90V to 264V, 47 to 63 Hz

Maximum VA

4155C and 4156C: 450VA

41501B: 350 VA

Regulatory Compliance

EMC:

EN 61326-1:+A1, AS/NZS 2064.1

Safety:

CSA C22.2 NO.1010.1-1992

IEC 61010-1:+A2/EN 61010-1:+A2

UL3111-1:1994

Certification:

CE, CSA, NRTL/C, C-Tick

Dimensions:

4155C and 4156C:

235mm H × 426mm W × 600mm D

41501B:

190mm H × 426mm W × 600mm D

Weight (approx.):

4155C and 4156C: 21kg

41501B: 16kg

(option 412, HPSMU + 2×PGU)

4155C and 4156C

Furnished Accessories

Triaxial cable, 4 ea. (4155C)

Kelvin triaxial cable, 4 ea. (4156C)

Coaxial cable, 4 ea.

Interlock cable, 1 ea.

Keyboard, 1 ea.

User manual, 1 set

Sample application program disk, 1 ea.

Sample VEE program disk, 1 ea

VXI*plug&play* drivers disk for the

4155C and 4156C, 1 ea.

VXI*plug&play* drivers disk for the

E5250A, 1 ea.

Accessory Specifications

Specification Condition

The “supplemental information” and “typical” entries in the following specifications are not warranted, but provide useful information about the functions and performance of the instruments. 23°C ± 5°C, 50% RH.

16440A

SMU/Pulse Generator Selector

The 16440A switches either an SMU or PGU to the associated output port. You can expand to 4 channels by adding an additional 16440A. The channel 1 PGU port provides “PGU OPEN” function, which can disconnect the PGU by opening a semiconductor relay. The

16440A cannot work without two pulse generator units of the 41501A/B (SMU and Pulse Generator Expander).

Channel configurations:

Two channels (CH1, CH2)

CH1: INPUT ports: 2

(SMU and PGU, PGU port has

additional series semiconductor relay)

OUTPUT port: 1

CH2: INPUT ports: 2 (SMU and PGU)

OUTPUT port: 1

Voltage & Current Range

Input port	Max. V	Max I
SMU	200 V	1.0 A
PGU	40V	0.2A (AC peak)

Supplemental Information (at

23°C ± 5°C, 50% RH)

SMU port leakage current:

< 100fA @100V

SMU port residual resistance (typical):

0.2Ω

SMU port stray capacitance (typical

@1MHz):

Force ↔ Common: 0.3pF

Force ↔ Guard: 15pF

Guard ↔ Common: 130pF

PGU port residual resistance: 3.4Ω

PGU port OFF capacitance (typical):

5pF

PGU port OPEN capacitance (typical):

700pF (@ 1MHz, Vin - Vout = 0V)

PGU port signal transfer characteristics

Overshoot: < 5% of pulse amplitude

(@20ns leading and trailing time, 50Ω

pulse generator source impedance,

50pF and 1MΩ in parallel load).

General Specifications

Dimensions:

50 mm H × 250 mm W × 275 mm D

Weight (approx.): 1.1kg

16441A R-BOX

The 16441A R-BOX adds a selectable series resistor to the SMU output. You can select the resistor from the setup page, and the voltage drop due to the series resistor is automatically compensated for in the measurement result.

Measurement limitations with the 4155C and 4156C and R-BOX

If you measure device characteristics including negative resistance over 1MΩ with the 4155C/4156C and R-BOX, there is a possibility that they cannot be measured.

There is a possibility that the 4155C and 4156C cannot perform measurements because of DUT oscillations even with the R-BOX. Whether oscillation occurs or not depends upon the DUT and measurement conditions.

Number of SMU channels that can add resistor: 2

Resistor values:

1MΩ, 100kΩ, 10kΩ, 0Ω (each channel)

Resistance accuracy:

0.3% (at 23°C±5°C, between input-output terminal)

Maximum voltage: 200V

Maximum current: 1A (0Ω selected)

Kelvin connection: Kelvin connection

is effective only when 0Ω is selected.

Supplemental Information (at

23°C ± 5°C, 50% RH)

Leakage current: <100fA @ 100V

General Specifications

Dimensions:

72 mm H × 250 mm W × 270 mm D

Weight (approx.): 1.6kg

16442A Test Fixture

Channel Information

SMU:

6 channels (1 triaxial connector/channel)

3 channels (1 Kelvin triaxial connector/channel)

VSU:

2 channels (1 BNC connector/channel)

VMU:

2 channels (1 BNC connector/channel)

PGU:

2 channels (1 BNC connector/channel)

GNDU:

1 channel (1 triaxial connector)

INTLK: 6 pin connector

Supplemental Information (at

23°C ± 5°C, 50% RH)

SMU channel:

Leakage current: 10pA max @200V

(Force or Sense ↔ Common)

Stray capacitance: 15pF max

(Force or Sense ↔ Common)

Stray capacitance: 3pF typical

(Force or Sense ↔ Other SMU)

Residual resistance: 60mΩ typical

(Force, Sense)

Guard capacitance: 70pF max

(Force or Sense ↔ Guard)

VSU channel residual resistance:

60m Ω typical

VMU channel residual resistance:

60m Ω typical

PGU channel characteristic impedance:

50 Ω typical

GNDU channel residual resistance:

40m Ω typical (Force, Sense)

General Specifications

Temperature range

Operating: +5°C to +40°C

Storage: -40°C to +70°C

Humidity range

Operating: 5% to 80% RH

(no condensation)

Storage: 5% to 90% RH at 65°C

(no condensation)

Dimensions:

140 mm H \times 260 mm W \times 260 mm D

Weight (approx.): 2.5kg

For more information about Agilent Technologies semiconductor test products, applications, and services, visit our website:

www.agilent.com/go/semiconductor

or you can call one of the centers listed and ask to speak with a semiconductor test sales representative.

For more information about other Agilent test and measurement products, go to

www.agilent.com

United States:

1 800 452 4844

Canada:

1 877 894 4414

Europe:

(31 20) 547 2000

Japan:

(81) 426 56 7832

Fax: (81) 426 56 7840

Latin America:

(305) 269 7500

Fax: (305) 269 7599

Australia/New Zealand:

1 800 629 485 (Australia)

Fax: (61 3) 9272 0749

0 800 738 378 (New Zealand)

Fax: (64 4) 495 8950

Asia Pacific:

(852) 2599 7889

Fax: (852) 2506 9233

Taiwan:

(886 2) 717 9524

Fax: (886) 2 718 9860

Korea:

(822) 769 0800

Fax: (822) 786 1083

Singapore:

(65) 1 800 292 8100

Fax: (65) 275 0387

Product specifications and descriptions in this document subject to change without notice.

Copyright ©2000 Agilent Technologies

Printed in U.S.A. 11/00

5988-0301EN



Agilent Technologies

Innovating the HP Way